

BASKET FAN


RECIRCULATION

HIGHT OUTPUT PERFORMANCE, LOW COST!

Our deluxe Basket Fan series combines high output performance, low cost and maintenance, and energy efficiency to give you one of our best-valued fan series. It provides a high-velocity air pattern with quiet operation.


WHEN APPLIED PROPERLY, SKOV-SECCO RECIRCULATION FANS CAN BE USED IN THE FOLLOWING APPLICATIONS:

- Air de-stratification reduces heating and cooling bills
- Air exchange when placed in a wall opening or in open sidewall buildings
- Consistent air temperature throughout a room, building- or barn
- Heat stress relief indoors and outdoors for young and adult livestock
- Surface drying (including animal bedding)
- People and animal cooling
- Machine/compressor cooling
- High-velocity air cooling
- Insect control

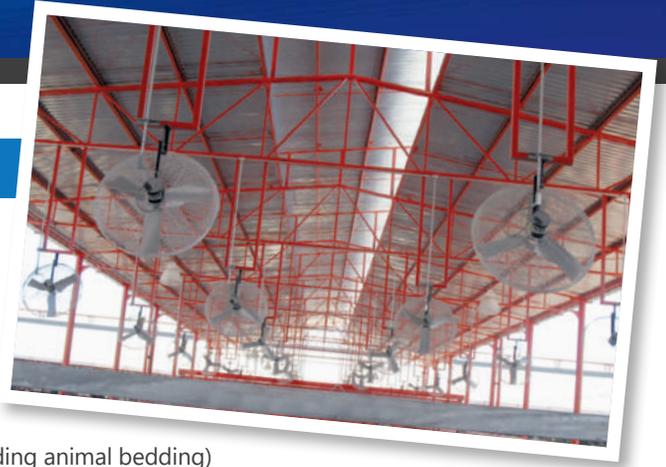

FEATURES

- Heavy wire with powder coating finishing to prevent corrosion for years
- Airflow design to maximize the efficiency
- Three blades are made with nylon PA66 + fiber reinforcement
- Impeller pitch and motor are closely matched to provide maximum airflow output and the best efficiency
- All stainless steel base and guard
- All top motion motors are designed and rated for years of trouble-free and quiet operation with high efficiency
- Swivel mounting bracket for multiple mounting (ceiling, post, and wall)
- CE and cCSAul certification
- Optional OSHA approved safety guard

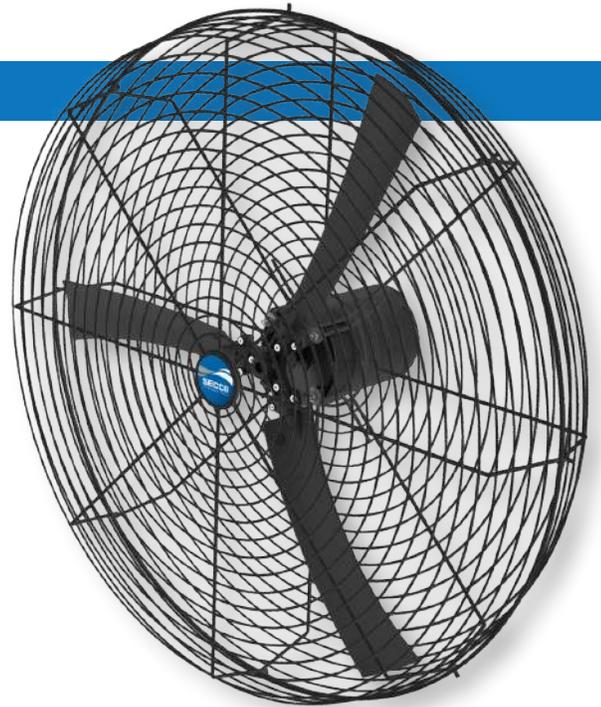

For more information
skov-secco.com




SKOV-SECCO
United by Dairy


BASKET FAN

RECIRCULATION

| General Info | Phase | Hz | Volts | Pole | Nominal Blade Size (mm) | Blade Qty | Blade Material | Impeller RPM | Airflow (CFM) [m ³ /h] | Input Power (W) | Amps | Power Factor | FLA | Motor Certification | Thermal Protection |
|--------------|-------|-------|-----------|------|-------------------------|-----------|----------------|--------------|-----------------------------------|-----------------|------|--------------|-------------|---------------------|--------------------|
| 24" | 1 | 50 Hz | 230 | 4 | 610 | 3 | Nylon | 1388 | 4852 [8243] | 489 | 2.92 | 0.72 | 3.01 | CE | Yes |
| | | 60 Hz | 230 | 4 | | | | 1645 | 5345 [9081] | 565 | 2.56 | 0.95 | 2.80 | cCSAul | Yes |
| 36" | 1 | 50 Hz | 220 / 240 | 6 | 910 | 3 | Nylon | 926 | 8746 [14 859] | 434 | 1.93 | 0.97 | 2.10 | CE | Yes |
| | | 60 Hz | 230 | 8 | | | | 843 | 9252 [15 719] | 575 | 2.82 | 0.88 | 3.09 | cCSAul | Yes |
| | 3 | 50 Hz | 400 | 6 | | | | 924 | 8821 [14 987] | 434 | 1.24 | 0.51 | 1.30 | CE | Yes |
| | | 60 Hz | 230 / 460 | 8 | | | | 849 | 9310 [15 818] | 495 | 1.08 | 0.57 | 2.60 / 1.30 | cCSAul | No |

| General info | Frame | Motor Specification | Protection Class | Speed | Ambient Temperature Rating | Nominal Power | Service Factor | Weight (kg) | Guard | Insulation Class | OSHA Protection |
|--------------|---------|---------------------|------------------|--------|----------------------------|----------------|----------------|-------------|------------------------|------------------|-----------------|
| 24" | NEMA 56 | TEAO | IP54 | Single | 40°C | ½HP – 0.375 kW | 1.0 | 18 | Steel + Powder Coating | F | Optional |
| 36" | NEMA 56 | TEAO | IP54 | Single | 40°C | ½HP – 0.375 kW | 1.0 | 23 | Steel + Powder Coating | F | Optional |

Other configurations are available.
 The products shown in this brochure are covered by a limited warranty.
 Due to our continual effort to provide better products and services; literature, products, performance data, and prices may change without notice.

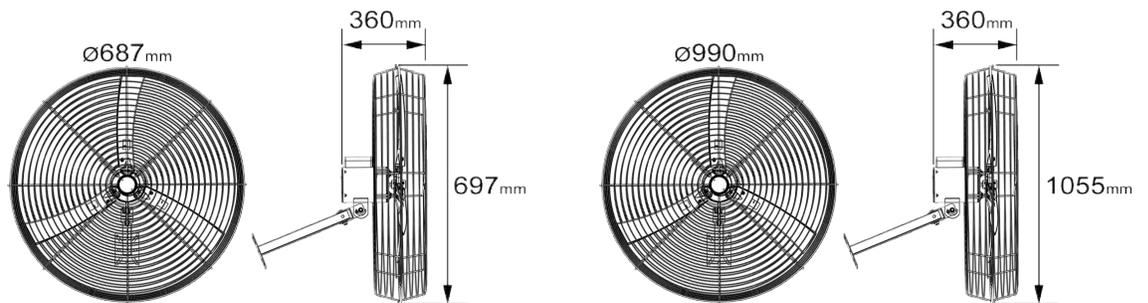

For more information
skov-secco.com

info@skov-secco.com

