

Self-Locking Feed Front SV

Type SV = Self-Locking Feed Front with Variable Neck Width

The feed front with its special strength in the beef cattle and young stock range

Beef cattle:

- The tubing of each feed space is welded in three places (as shown below). High stability even for heavy beef cattle breeds.

Young cows:

- Small feed space widths are possible for optimum space utilisation due to construction

Features:

- Quiet locking with plastic-coated locking bolt
- Adjustable neck width
- Feed space individually lockable
- Feed front panel can be swung out up to 3.00 m (level installation)
- Angled installation possible

Technical advantages:

- High stability due to massive tubing
- Frame 2" (60 mm) x 2.9 mm, filler bars and yokes 1 1/4" (42 mm) x 2.6 mm
- Long life-cycle due to hot-dip galvanising inside and out
- Low-wear turning link

Safety/cow comfort:

- Safe for calves and collar-wearing animals due to optimised yoke bracket geometry
- Noise reduction due to large, sturdy rubber buffers

Security advice:

Fixation of the animals only under supervision

4 Advantages



Triple welded



Solid plastic-coated locking bolt




Heavy rubber buffers for maximum noise reduction



Noise reduction and deflector bracket (bottom)

Extension Sections

Telescoping Bracket	Standard	334408	1.4 kg
Telescoping Bracket	Standard Angled	334410	1.4 kg
Telescoping Bracket	Standard 2-Way	334409	2.3 kg
Telescoping Bracket	Compact 1-Way (wall mounting support tubes)	334406	1.6 kg
Telescoping Bracket	Compact 2-Way	334407	2.8 kg
Telescoping Bracket	Clamp 102 1-Way	334422	2.3 kg
Telescoping Bracket	Clamp 102 2-Way	334423	3.6 kg
Telescoping Bracket	Clamp 76 1-Way	334420	2.4 kg
Telescoping Bracket	Clamp 76 2-Way	334421	3.2 kg
Telescoping Bracket	with Eye Bolt	334411	2.2 kg

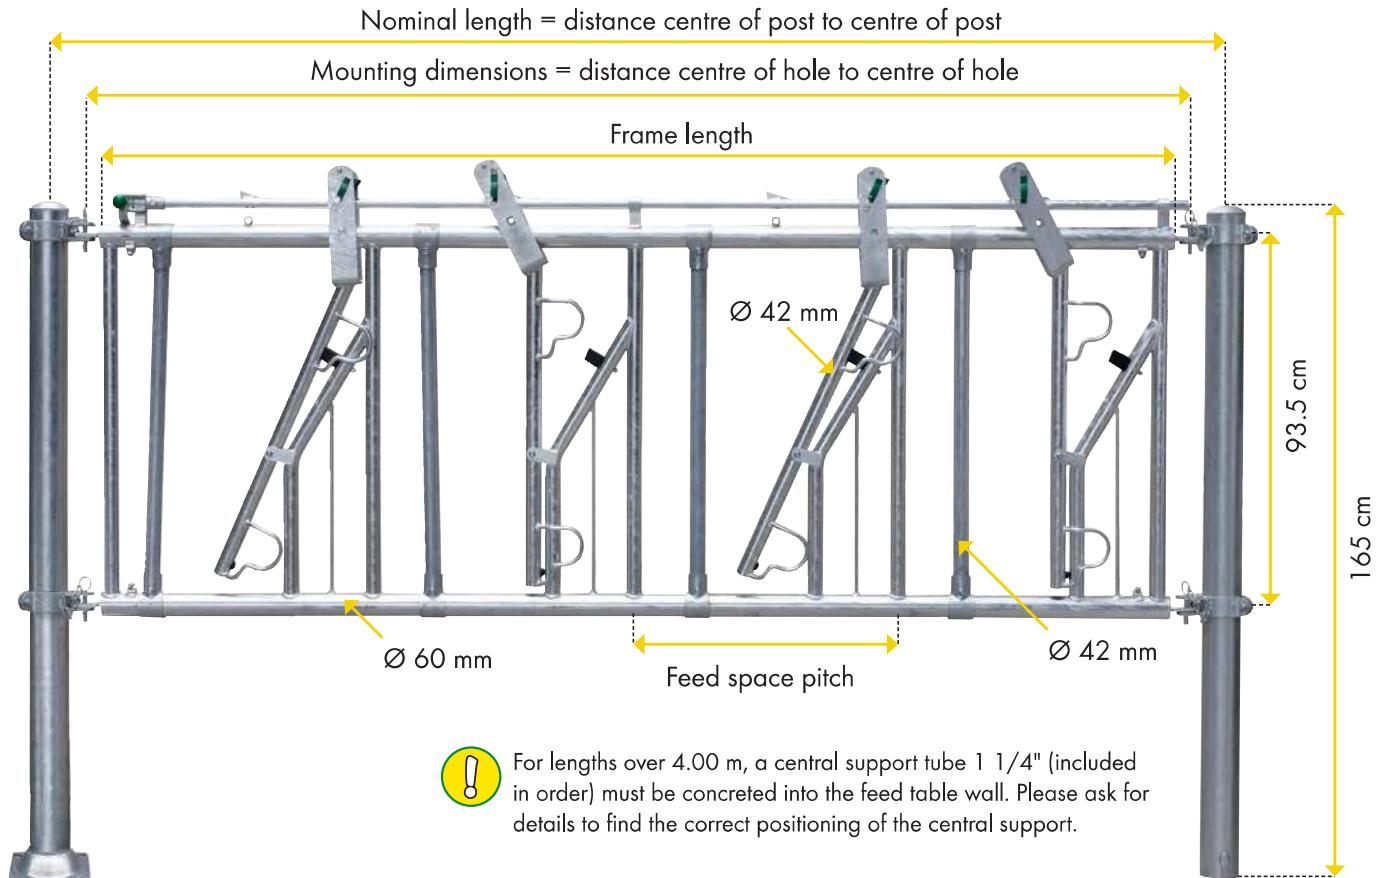

Self-Locking Feed Front SV

	Ref.	Frame length	Mounted length	Feed space width	Feeding place pitch	Weight
12/6 Young Stock	321035	572 cm	581 - 600 cm	50 cm	46.5 cm	214 kg
9/6	321032	572 cm	581 - 600 cm	66.7 cm	63 cm	181 kg
8/6	321030	572 cm	581 - 600 cm	75 cm	70.5 cm	179 kg
10/5 Young Stock	321033	472 cm	481 - 500 cm	50 cm	46.5 cm	177 kg
8/5	321029	472 cm	481 - 500 cm	62.5 cm	58 cm	158 kg
7/5	321027	472 cm	481 - 500 cm	71.4 cm	66 cm	146 kg
6/5	321025	472 cm	481 - 500 cm	83.3 cm	80 cm	140 kg
6/4.4	321043	412 cm	421 - 440 cm	73 cm	67.5 cm	121 kg
7/4 Young Stock	321026	372 cm	381 - 400 cm	57 cm	52 cm	120 kg
6/4	321024	372 cm	381 - 400 cm	66.7 cm	61 cm	119 kg
5/4	321023	372 cm	381 - 400 cm	80 cm	75.5 cm	112 kg
5/3.4	321042	312 cm	321 - 340 cm	68 cm	61 cm	100 kg
5/3 Young Stock	321022	272 cm	281 - 300 cm	60 cm	53 cm	88 kg
4/3	321021	272 cm	281 - 300 cm	75 cm	66.5 cm	88 kg
2/1.6	321041	132 cm	141 - 160 cm	80 cm	62.5 cm	46 kg
1/1	321020	72 cm	81 - 100 cm	100 cm	85 cm	27 kg

Name example

Feed space / Nominal length (m)
12 / 6



Please order telescoping brackets, posts and assembly accessories separately



Feed space width = Nominal length : Feed space